


BZ-Zyklon

Flüssigkeitsabscheider
Separator for separation of liquids

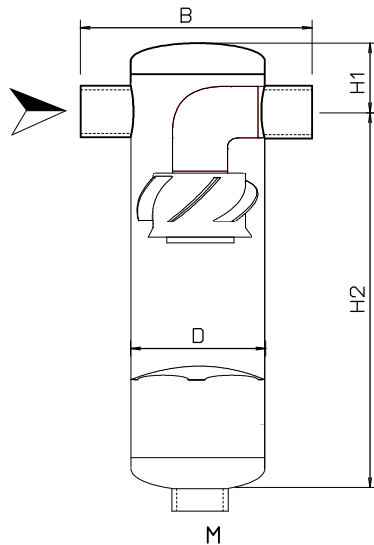

Standard 15 – 32 Gewindeanschluß

Standard 15 – 32
screw connection

Material:

Stahl geschweißt, außen grundiert RAL 2002
Steel welding design, outside priming coat RAL 2002

Anschlüsse: Innengewinde
connection: pipe thread

Abnahme: gem. DGRL 2014/68 + AD2000
Inspection: acc. PED 2014/68+ AD2000

Designtemperatur: max. 120 °C
Design temperature:

Type BZ	DN	D Ø	H1	H2	B	M	barg	G-Ltr.	S - Ltr.	kg
15	½"	64	65	220	120	½"	16	0,73	0,25	1,70
20	¾"	64	65	220	120	½"	16	0,73	0,25	1,90
25	1"	102	85	270	160	1"	16	2,60	0,60	4,20
32	1 ¼"	102	85	270	170	1"	16	2,60	0,60	4,60

G-Ltr: Gesamtvolumen – volume / S-Ltr.: Sammelraum – collecting room
Sonderausführungen auf Anfrage / Special Version on request

